

## FOR FUTURE USE AND REFERENCE

RETAIN THIS INSTRUCTION SHEET AND THE CRIB TOOLS IN THE ORIGINAL SACK AND SECURE IT TO THE SPRING UNDER THE MATTRESS WITH PLASTIC TIES.

**CARE INSTRUCTIONS:** The natural warmth of wood is a lasting value. Character marks, checking and grain variations are part of the beauty of wood and, therefore, should not be a concern. If treated with care, this solid wood product will last you for many years to come. Once every week, wipe your Baby's Dream furniture with Pledge®, lemon oil or other similar wood treatment products. If you encounter any roughness in the finish of your new crib, fold a piece of regular white paper—not tissue or newspaper—and rub it gently against the surface until the desired smoothness is achieved. If refinishing, use a non-toxic finish specified for children's products. Let dry, sand with a very fine product such as folded paper or dish washing sponge and, finally, apply water-based baby-safe lacquer for the perfect matching shine.

### **WARNING!**

To insure your child's safety and for your own peace of mind, be sure to follow instructions properly. Failure to follow these warnings and assembly instructions could result in serious injury or death. Before each usage or assembly, inspect the crib for damaged hardware, loose joints, missing parts or sharp edges.

- ✓ **DO NOT** use the crib if any parts are missing or broken.
- ✓ **DO NOT** substitute parts. Ask your dealer or write to Baby's Dream Furniture for replacement parts and instructional literature if needed.
- ✓ Make sure that all bolts and screws are properly tightened. **DO NOT** over- or under-tighten.
- ✓ **AVOID STRANGULATION:** As soon as an infant can sit or stand up, close the crib gate or raise the Drop Front permanently.
- ✓ **DO NOT** place the crib near a window where cords from blinds or drapes may strangle a child.
- ✓ **DO NOT** tie pacifiers, necklaces or any other items around a child's neck or on the crib parts.

### **WARNING!**

Strings can cause strangulation! Do not place items with string around a child's neck, such as hood strings or pacifier cords. Do not suspend strings over a crib or attach string toys.

- ✓ **NEVER** use plastic shopping bags or other film as mattress covers, because they can cause suffocation. For a newborn, adjust the spring on the highest level of the Height Adjuster and open the gate or lower the Drop Front for easy access.
- ✓ **DO NOT** leave a child in a crib with an open gate or lowered Drop Front. Be sure the gate is closed or the Drop Front is raised and locked in position whenever the child is in the crib. After closing the gate or raising the Drop Front, make sure the latches are secure.
- ✓ The child must be seated at the rear of the crib when lowering or raising the gate or Drop Front.
- ✓ As your child grows, adjust the height of the spring down so that he/she cannot pull himself/herself out of the crib. When the child is able to pull to a standing position, set the mattress to the lowest position and remove bumper pads, large toys and other objects that could serve as steps for climbing out. When the child is able to climb out or reaches the height of 35" (90<sup>cm</sup>), the bed should no longer be used in the form of a crib. You can continue to use this crib as a youth or toddler bed for another 2 to 3 years by using the **Youth Bed Conversion Kit**.

**ANY MATTRESS USED IN THIS CRIB MUST BE AT LEAST 27<sup>1</sup>/<sub>4</sub>" X 51<sup>5</sup>/<sub>8</sub>" WITH A THICKNESS NOT EXCEEDING 6". DO NOT USE A WATER MATTRESS WITH THIS CRIB.**

This crib conforms to the applicable regulations promulgated by the Consumer Product Safety Commission.



This product may be covered by one or more of the following patents: D366,778; D366,970,5,077,846 and other patents pending.



**BABY'S DREAM**  
FURNITURE, INC.

Buena Vista, GA 31803-0579  
www.babysdream.com



# "Youth Bed Conversion from Crib"

**Step 1:** Remove the front frame from the crib by removing the four bolts that attach it to the front posts. Remove the Gate from the front frame by removing the screws that attach the gate to the hinge. Remove the trigger latches from the gate using a short Phillips screwdriver (not included).

**Step 2:** Insert the tension pins into the holes in the ends of the gate and youth rail (If needed use a hammer to tap the pins *1/2 way only* into the holes)

**Step 3:** Slide the gate and youth rail pins into the posts and lock together using two 70mm bolts and the Allen wrench.



**Step 4:** Make sure that the Spring is mounted in the lowest position when set up as Youth bed.

**Step 5:** As your child grows and matures he/she may no longer need the Guard rail to prevent them from rolling out of the crib. You may decide that you would prefer to remove the Guard rail from the Youth bed conversion. This can easily be accomplished by removing the bolts from the youth rail, removing the Guard rail, and re-attaching the youth rail.

# "Adult Bed Conversion from crib"

## Using Wood Rails (Optional) NOT INCLUDED

**Step 1:** Remove the Spring and End Frames from the assembled crib. Remove the Gate from the Front frame using a Phillips head screwdriver.

**Step 2:** You now need the set of short posts, the top cap, three pre-glued dowels, a small cup of water, and the front frame for this conversion. When you invert the front frame you will see three holes. The pre-glued dowels will need to be dipped into the water to activate the glue. After wetting you must immediately insert them into the holes in the top cap and tap them down lightly using a hammer or pushing them in with your fingers. After all three are in the cap you must attach the cap to the front frame by lining up on the cap using the palm of your hand. Make sure that the cap is flush against the front frame. Let it sit in place for 15 minutes until dry.



**Step 3:** Next you need to attach the short posts to the front frame with cap using four 70mm bolts and the Allen wrench. Make sure that the cap fits tight against the post before tightening.

**Step 4:** To attach the headboard and footboard to the wood bed rails you will need the eight 70mm bolts and the Allen wrench. Begin by looking at the bed rail. The side of the rail with the wood cleat and the lip is the top side (the box spring will sit on top of this cleat). This side must be mounted up towards the top. Attach the bed rails using eight 70mm bolts and the Allen wrench.



## Using Metal Rails (Optional) NOT INCLUDED

**Step 1:** Follow steps 1 thru 3 above. Attach the metal rails to the head and footboard using bolts, washers and nuts (Tighten!!).

# CRIB ASSEMBLY INSTRUCTIONS

**Step 1:** To assemble the Back Frame to the Back Posts you will need (four) 70mm Bolts and the Allen Wrench. Make sure that the bolts are not completely tightened until the Top Cap rail of the back frame is against the Back posts. Tighten the bolts at this time using your Allen wrench. \* Note in the photo how the posts are positioned.



**Step 2:** To assemble the Front Frame with gate to the front posts you will need (four) 70mm Bolts and the Allen Wrench. Make sure that the gate lowers to the outside of the crib. Open and close the gate to check for proper alignment of the triggers and strike plates (The gate must stop against the back side of the strike plates when closed!).



**Step 3:** To assemble an End frame to the Front and Back assemblies you will need four 70mm bolts and the Allen wrench. Make sure that the frames are positioned as shown in the photos prior to attachment. Attach the End frame to the Back assembly using two 70mm bolts and the Allen wrench. Repeat the above instructions for attachment to the Front assembly.

**Step 4:** Repeat step 3 to attach the other End frame.



**Step 5:** To attach the Spring (mattress support) to the crib you will need the following items: Four spring bolts, the mattress support, and the hex wrench. Decide which position you want the spring mounted. The low position is for the Youth bed and must be used for a child that is standing, pulling his/herself up, or trying to climb out of crib. To mount the Spring you must extend the spring arms outward and line up the arm holes with the inserts in the posts. Insert and tighten the spring bolts using the hex wrench.

**Step 6:** Open and close the gate several times to make sure that the trigger latches open properly and lock securely. Make sure that the gate stops against the strike plate back stop when closing.





# “Infinity™” Drop Gate Instruction Sheet

Read All Instructions Before Assembling Crib. Keep Instructions For Future Use.

**A PHILLIPS HEAD SCREWDRIVER IS REQUIRED**

### PARTS LIST


- (1) Back Frame
- (1) Front Frame w/gate attached
- (1) Gate (attached to front frame)
- (2) End Frames
- (2) Front Posts
- (2) Back Posts
- (2) Short Posts
- (1) Youth rail
- (1) Top Cap

### HARDWARE

- (16) 70mm bolts
- (1) Allen Wrench
- (1) Hex Wrench
- (2) Trigger Latches/attached to gate
- (2) Strike Plates/attached to the front posts
- (3) Pre-glued Dowels (10mm x 25mm)
- (4) Spring Bolts
- (6) Tension Pins
- (4) Youth Bed Guard Rail Spacer
- (1) Spring (Mattress Support)



70mm Bolt

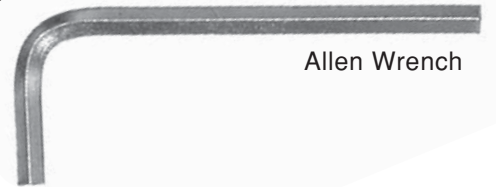

Allen Wrench



Hex Wrench



Youth Bed Guard Rail Spacer



Tension Pin



Spring Bolt



Pre-glued Dowel (10mm x 25mm)



Back Frame



End Frame



Front Frame with Gate

Back Posts



Front Posts



Short Posts



Strike Plate



Top Cap



Youth Rail



Trigger Latch



Spring (Mattress Support)